



CONSTRUCTION MATERIALS

TECHNOLOGIES

LABORATORY TEST REPORT

Report for: Sheffield Metals International
5467 Evergreen Parkway
Sheffield Village, OH 44054

Attention: Adam Mazzella

Product Names:	SMI 1.5" SnapLock 550 Standing Seam	Manufacturer:	Sheffield Metals International
Project No.:	SHMI-004-02-01	Source:	Sheffield Metals International
Date Received:	Dec. 28, 2017	Date Tested:	Jan. 8, 2018

Purpose: Determine the uplift resistance of the SMI 1.5" SnapLock 550 Standing Seam panels in accordance with **UL 580-06 Test for Uplift Resistance of Roof Assemblies** and **UL 1897-04 & -12 Uplift Tests for Roof Covering Systems**.

Test Methods: Testing was completed as described in UL 580-06 *Test for Uplift Resistance of Roof Assemblies* and UL 1897-04 & -12 *Uplift Tests for Roof Covering Systems*. Specimens were tested to the loading schedule as described in UL 580, and where applicable, incrementally loaded in accordance with UL 1897 until failure.

Sampling: SMI 1.5" SL 550 panels, clips and fasteners were supplied by Sheffield Metals International. All other materials were provided by PRI Construction Materials Technologies LLC and purchased through local distribution.

Panel Description: SMI 1.5" SL 550: Min. 0.029" 3105 H24M aluminum alloy ($F_y = 23.1$ ksi) preformed, snap-together, 1.5" standing seam panels; 15" wide installed coverage; Profile drawing is contained in Appendix B.

Clips: 1-5/8" high x 2-1/8" wide x 3.5" long, 20 ga. galvanized steel, single-piece clip; Clip drawing is contained in Appendix B.

SHMI-004-02-01.2 PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL
The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Deck Descriptions: (All tests)	Underlayment:	ASTM D 226 Type II. Underlayment installed with minimum 4 in. side-lap and 6 in. end-laps and fastened using 12 ga., 1-1/4" ring shank nails and 32 ga., 1-5/8" tin caps spaced 6" o.c. in the laps and two staggered rows 12" o.c. in the field.
	Deck:	15/32" APA span rated CDX plywood installed over No. 2 lumber supports spaced 24" o.c. Decking attached with 0.113" x 2-3/8" ring shank nails spaced 6" o.c. along the perimeter and intermediate supports.
	Specimen Sealing:	Polyethylene film placed under the metal roof panels; tape ¹

¹It is the judgment of the test engineer that the film and tape used to seal the specimen against air leakage did not influence the results of the test.

Results:

Test data are contained in Appendix A. Installation details are shown in Appendix B. Photographs of specimens after testing are contained in Appendix C.

Table 1. Summary of Test Results

Specimen No.	Panel	Attachment	Passing Uplift Pressure (psf)	Failure Mode
1	SMI 1.5" SnapLock 550 Standing Seam	Clips spaced 16" o.c and secured to deck with two (2) #10-13 x 1" PH woodscrews. Perimeter secured 6" o.c. with #10-14 x 1.5" HWH woodscrews with 0.5" O.D. sealing washers.	135	Seam disengaged

Classification:

Specimen No. 1 installed as described herein meets **Class 90** requirements.

SHMI-004-02-01.2


PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL


The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Statement of Attestation:

Testing was conducted in accordance with **UL 580-06 Test for Uplift Resistance of Roof Assemblies** and **UL 1897-04 & -12 Uplift Tests for Roof Covering Systems**. The test results and interpretations presented herein are representative of the materials supplied by the client.

Signed: _____


Zachary Priest, P.E.
Director

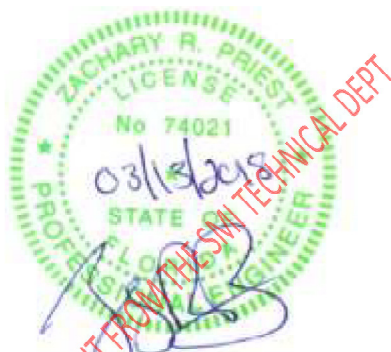

Report Issue History:

Issue #	Date	Pages	Revision Description (if applicable)
Original	01/26/2018	8	NA
Rev. 1	02/12/2018	7	updated panel yield strength
Rev 2	03/06/2018	7	Updated panel description

SHMI-004-02-01.2

PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Specimen No. 1 (UL 580 Load Schedule)

Class 30 Loading Sequence (UL 580)								
Duration (min)	Positive Pressure (psf)	Negative Pressure (psf)	Max Deflection Under Load (in.)				Result	
			1	2	3	4		
5	0.0	16.2	0.016	0.373	0.057	0.473	PASS	
5	13.8	16.2	0.063	0.631	0.158	0.679	PASS	
60	13.8	8.1-27.7 ¹	0.036	0.591	0.137	0.729	PASS	
5	0.0	24.2	0.017	0.557	0.115	0.689	PASS	
5	20.8	24.2	0.070	0.823	0.224	1.000	PASS	
		Permanent Set	0.000	0.009	0.004	0.024	PASS	
Class 60 Loading Sequence (UL 580)								
Duration (min)	Positive Pressure (psf)	Negative Pressure (psf)	Max Deflection Under Load (in.)				Result	
			1	2	3	4		
5	0.0	32.3	0.033	0.667	0.154	0.817	PASS	
5	27.7	32.3	0.124	0.992	0.308	1.197	PASS	
60	27.7	16.2-55.4 ¹	0.084	0.871	0.288	0.973	PASS	
5	0.0	40.4	0.048	0.887	0.256	0.980	PASS	
5	34.6	40.4	0.160	1.189	0.426	1.354	PASS	
		Permanent Set	0.001	0.041	0.008	0.060	PASS	
Class 90 Loading Sequence (UL 580)								
Duration (min)	Positive Pressure (psf)	Negative Pressure (psf)	Max Deflection Under Load (in.)				Result	
			1	2	3	4		
5	0.0	48.5	0.076	1.017	0.320	1.138	PASS	
5	41.5	48.5	0.225	1.257	0.485	1.369	PASS	
60	41.5	24.2-48.5 ¹	0.160	1.145	0.410	0.294	PASS	
5	0.0	56.5	0.127	1.066	0.371	1.205	PASS	
5	48.5	56.5	0.235	1.255	0.457	1.373	PASS	
		Permanent Set	0.001	0.051	0.056	0.070	PASS	
Notes: 1) Oscillation frequency is 10±2 sec per cycle								

SHMI-004-02-01.2

PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Specimen No. 1 (UL 1897 Load Schedule)

Ultimate Loading Sequence (UL 1897)						
Duration (min)	Combine Test Pressure (psf)	Max Deflection Under Load (in.)				Result
		1	2	3	4	
1	120	0.267	1.253	0.44	1.377	PASS
1	135	0.348	1.257	0.476	1.399	PASS
1	150					PANEL DISENGAGED; FAIL AT 8 SEC


ASTM E 8 Tensile Properties for SMI 1.5" SL 550

Specimen	Width (in)	Thickness (in)	Gage Length (in)	Yield Strength (ksi)	Tensile Strength (ksi)	Elongation at Break (%)
1	0.490	0.032	2	23.3	26.1	14.3
2	0.489	0.032	2	23.2	25.9	13.8
3	0.490	0.032	2	23.5	26.3	13.2
4	0.491	0.032	2	23.8	26.5	14.2
5	0.490	0.032	2	23.5	26.1	13.0
Average				23.5	26.2	13.7
St.Dev.				0.2	0.2	0.6


SHMI-004-02-01.2

PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

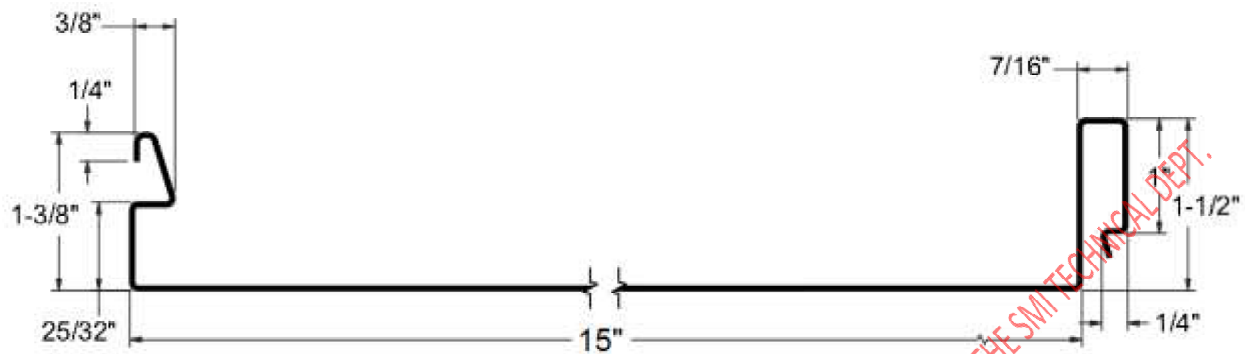

SMI 1.5" SnapLock 550 Standing Seam Panel Profile

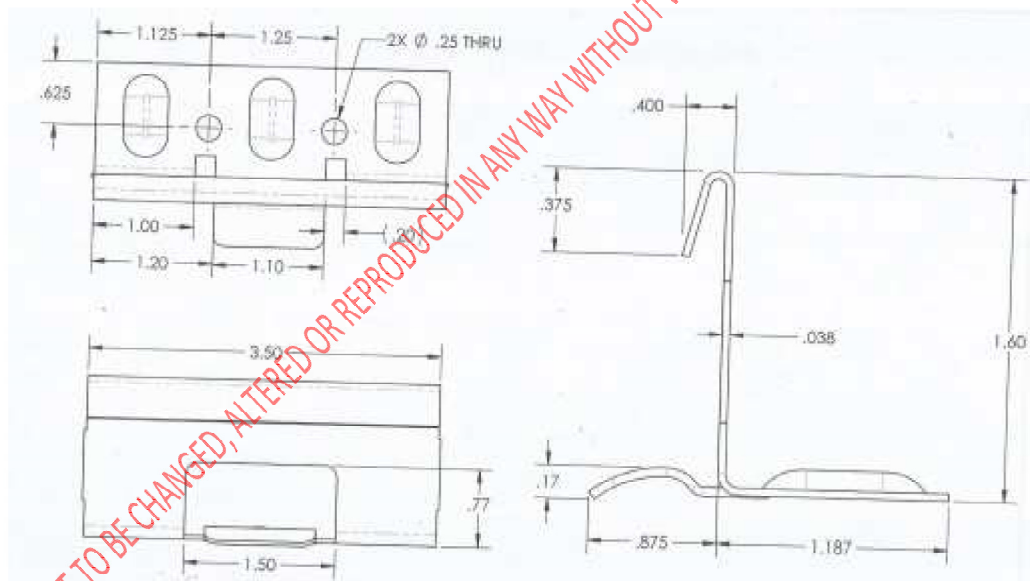

SMI 1.5" SnapLock 550 Clip

SHMI-004-02-01.2

PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.



Specimen No. 1 Photograph – After Testing

END OF REPORT

SHMI-004-02-01.2

PRI-CMT Accreditations: AAMA; CRRC; IAS; LA-DBS; Miami-Dade; State of Florida; UL

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.