

**ASTM E1680 & ASTM E 1646  
TEST REPORT**


**Rendered to:**

**SHEFFIELD METALS INTERNATIONAL**

**MODEL DESIGNATION: SMI 1-1/2" SnapLock 550 over Plywood  
PRODUCT TYPE: Standing Seam Roof System (24 Ga. Steel)**

**This report contains in its entirety:**

**Cover Page:** 1 page  
**Report Body:** 6 pages

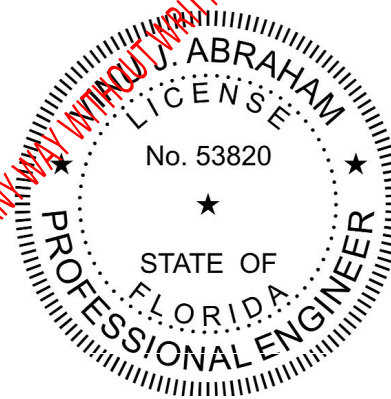

Digitally Signed by: Vinu Abraham  
2012.03.12 17:32:48  
-04'00'

THIS REPORT IS NOT TO BE CHANGED, ALTERED OR REPRODUCED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THE SMI TECHNICAL DEPT.

<b>Report No.:</b>	B5925.02-450-18
<b>Test Dates:</b>	2/9-16/12
<b>Report Date:</b>	3/2/12
<b>Test Report Retention End Date:</b>	3/2/16



## Sheffield Metals International

SMI 1-1/2" SnapLock 550 over Plywood (ASTM E1680 & ASTM E 1646)

Test Report #: B5925.02-450-18

### 1.0 MANUFACTURER'S IDENTIFICATION

- 1.1 Name of Applicant: Sheffield Metals International  
5467 Evergreen Parkway  
Sheffield Village, OH 44054  
Voice: 904.413.7425
- 1.2 Contact Person: Jim Mitchell

### 2.0 LABORATORY IDENTIFICATION

- 2.1 Test Notification #: N/A
- 2.2 Lab Certifications: Miami-Dade County (05-1014-01); Florida Building Code (TST1527); IAS (TL-244); AAMA; WDMA; Keystone Certifications; Texas Department of Insurance

### 3.0 SCOPE OF WORK

- 3.1 Introduction: Sheffield Metals International retained Architectural Testing, Inc. (ATI) to conduct air infiltration and water penetration testing on their SMI 1-1/2" SnapLock 550 over Plywood System per the requirements of ASTM.
- 3.2 Report Information: Table 1 provides the test dates for this specimen.

Table 1: Specimen Test Dates

Mock-Up	Specimen #	Test Dates
SMI 1-1/2" SnapLock 550 over Plywood	1A	2/9/2012 – 2/16/2012

### 4.0 PRODUCT IDENTIFICATION

- 4.1 Product Type: Standing Seam Roof System
- 4.2 Model Designation: SMI 1-1/2" SnapLock 550 over Plywood
- 4.3 Overall Size: 69" (wide) x 113" (long) – Structural roof frame
- 4.4 General Description: This specimen consisted of a 69" x 113" structural roof frame fabricated from 2x (nominal) wood with intermediate rafters spaced 24" on center. This assembly was sheathed with a single layer of 1/2" (nominal) structural CDX Plywood. This was followed by a single layer each of felt paper and moisture/fire barrier. The roofing panels were fastened over the moisture/fire barrier.
- 4.5 Sample Source: Sheffield Metals International provided the test specimen.



## 5.0 COMPONENT DESCRIPTION

### 5.1 Structural Support Frame:

Table 2 provides the structural support frame components used for the test specimen.

Table 2: Structural Support Frame Components

Item	Description
Intermediate rafters	There were four (4) intermediate rafters used in this specimen - spaced 24" on center – that were each fabricated from 2x southern Yellow Pine timber planks.
Plywood substrate	A single layer of 1/2" (minimum 15/32" thick) CDX Plywood was utilized across the entire surface of this specimen.

### 5.2 Accessories:

Table 3 provides a description of the accessories used in the test specimen.

Table 3: Accessories

Item	Description
Felt paper	30# Asphalt saturated organic paper (ASTM D226) meeting type II requirements
Moisture/fire barrier	Vesashield®

### 5.3 Metal Roof System:

Table 4 provides the metal roof system components used in the test specimen.

Table 4: Metal Roof System Components

Item	Overall Cross-Section	Material	Coil Width	Description
SnapLock 550 Panel	Please see part drawing labeled "SMI 1 1/2" SnapLock 550 for dimensions	24 ga. steel	24"	Each panel had an effective covering width of 19". Each finished roof panel was 111" (long) and featured a male vertical leg that was 1-3/8" (high) and a female vertical leg that was 1-1/2" (high).
SnapLock 1-1/2" clip	1.610" x 2.010" x 2.000" (long)	20 ga. G-90 galvanized steel	N/A	Each clip had three (3) holes capable of accommodating #10 pancake head screws (although only two [2] of the holes were utilized for installation).

## 6.0 SPECIMEN CONSTRUCTION

Table 5 provides the specimen construction.

Table 5: Specimen Construction

Location	Description
Plywood sheathing to structural support frame	2-1/2" x .131" EG ring shank nails spaced 4" on center at the perimeter
	2-1/2" x .131" EG ring shank nails spaced 6" on center at the field



Table 5: Specimen Construction (continued)

Location	Description
Felt paper	Spaced 8" on center (staggered) at the field
	Spaced 5" on center at the top and bottom of the specimen
	Spaced 7" on center at the sides of the specimen
	Spaced 6" on center at the overlap locations
Moisture/fire barrier	A single layer of VersaShield® with 4" laps was tacked in place across the top of the felt paper and was secured when the metal roofing was installed.
Roof panel	Each of the finished roof panels (three [3] full and one [1] partial) was mechanically attached to the plywood substrate along the male leg using a series of SnapLock clips spaced 4" and 24" from each panel end and at 24" on center thereafter. Each individual clip was hooked over the male leg and secured to the plywood substrate using two (2), #10 x 1" Weather Gard® pancake head screws (Type A). Once the clips were secured in place, the female leg of the adjacent roof panel was snap-locked over the clips and male leg of the panel.
Partial panel cut edges	The partial panel cut edges at the perimeter of the roof panel assembly were attached to the plywood substrate using a single row of #10 x 1" Weather Gard® pancake head screws (Type A) spaced at 6" on center.
Panel ends	The panel ends at the perimeter of the roof panel assembly were attached to the plywood substrate using a single row of #10 x 1" Weather Gard® pancake head screws (Type A) spaced at 4" on center.

## 7.0 TEST RESULT SUMMARY

Table 6 provides a summary of the test results for all tests conducted per ASTM E 1680 and ASTM E 1646. The temperature during testing was 72°F.

Table 6: Summary of Test Results

Specimen #	Test Method	Test Conditions	Conclusion
1A	Air Leakage Test (ASTM E 1680)	+1.57/-1.57 psf	N/A
	Water Penetration Test (ASTM E 1646)	12.00 psf	PASS



## 8.0 TEST SEQUENCE

Table 7 provides the test sequence for the specimen.

Table 7: Test Sequence

Specimen # 1A	
1.	Air Leakage Test - Preloads
a.	Positive Preload
b.	Negative Preload
c.	Positive Preload
d.	Negative Preload
e.	Positive Preload
f.	Negative Preload
2.	Air Leakage Test - Air Infiltration
3.	Air Leakage Test - Air Exfiltration
4.	Water Penetration Test

## 9.0 TEST RESULTS

### 9.1 Air Leakage Test

#### 9.1.1 Preload Pressures

Table 8 provides the pressure differences exerted across the test specimen during the preloads.

Table 8: Preload Pressures

	Test Pressure (psf)
Positive	64.63
Negative	64.63
Positive	64.63
Negative	64.63
Positive	64.63
Negative	64.63

#### 9.1.2 Results

Table 9 provides the results for the air leakage test.

Table 9: Air Leakage Test Results

	Test Pressure (psf)	Measured (cfm/ft <sup>2</sup> )
Air infiltration	+1.57	0.03
Air exfiltration	-1.57	0.04



9.2 Water Penetration Test

9.2.1 Results

Table 10 provides the results for the water penetration test.

Table 10: Water Penetration Test Results

Test Pressure (psf)	Spray Rate (gph/ft <sup>2</sup> )	Test Duration (minutes)	Ponded Water Depth (in.)	Conclusion
12.00	5.0	15.00	0.75	Pass

9.2.2 Conclusion

ATI observed zero (0) water infiltration through the test specimen; as such, this test specimen satisfies the requirements of ASTM E 1646.

**10.0 CERTIFICATION AND DISCLAIMER STATEMENT**

All tests performed on this test specimen were conducted in accordance with the specifications of the applicable codes, standards and test methods listed below by ATI. ATI does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products tested at ATI. ATI is not owned, operated or controlled by any company manufacturing or distributing products it tests. This report is only intended for the use of the entity named in Section 1.0 of this report. Detailed assembly drawings showing panel/clip thicknesses, panel/clip profiles, accessories, fasteners and all other applicable layouts are on file and have been compared to the test specimen submitted. ATI will service this report for the entire test record retention period. Test records that are retained such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation will be retained by ATI for the entire test record retention period.


If test specimen contains glazing, no conclusions of any kind regarding the adequacy or inadequacy of the glass in any glazed test specimen can be made. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. It is the exclusive property of the client so named herein and relates only to the specimen tested. This report may not be reproduced, except in full, without the written approval of ATI.

**11.0 APPLICABLE CODES, STANDARDS, AND TEST METHODS**

ASTM E 1680 – Standard Test Method for Rate of Air Leakage Through Exterior Metal Roof Panel Systems  
ASTM E 1646 – Standard Test Method for Water Penetration of Exterior Metal Roof Panel Systems by Uniform Static Air Pressure Difference

**12.0 WITNESSES (ALL OR PARTIAL)**

Vinu J. Abraham, P.E.	Vice President – Southeast Region	ATI
Jeff McGovern	Director – Regional Operations	ATI
Kristin Norville, E.I.	Operations Engineer	ATI
Veron Wickham	Technician	ATI
John Spallina	Technician	ATI

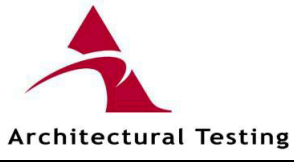

6655 Garden Road  
Riviera Beach, FL 33404  
P: 888.477.2454  
F: 561.881.0075  
ARCHTEST.COM

Test Report #: B5925.02-450-18  
Report Date: 3/2/2012  
Test Report Retention End Date: 3/2/2016  
Specimen #: 1A  
Page: 6 of 6

THIS REPORT IS NOT TO BE CHANGED, ALTERED OR REPRODUCED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THE SMI TECHNICAL DEPT.

ENGINEER OF RECORD

A handwritten signature in black ink, appearing to read 'Vinu J. Abraham'.

Digitally Signed by: Vinu Abraham  
Vinu J. Abraham, P.E.

3/2/2012

REPORT WRITER

A handwritten signature in black ink, appearing to read 'Angela Abramczyk'.

Digitally Signed by: Angela Abramczyk  
Angela Abramczyk

3/2/2012