

SHEFFIELD METALS TEST REPORT

SCOPE OF WORK

UL 580 UPLIFT RESISTANCE TESTING OF 0.040" ALUMINUM
1-3/4" SNAPLOCK PANELS OVER B-DECKING

REPORT NUMBER

I3448.02-450-44 R0

TEST DATE(S)

05/03/18 – 05/04/18

ISSUE DATE

08/14/18

RECORD RETENTION END DATE


05/04/22

PAGES

18


DOCUMENT CONTROL NUMBER

ATI 00512 (08/24/17)
RT-R-AMER-Test-2958
© 2017 INTERTEK

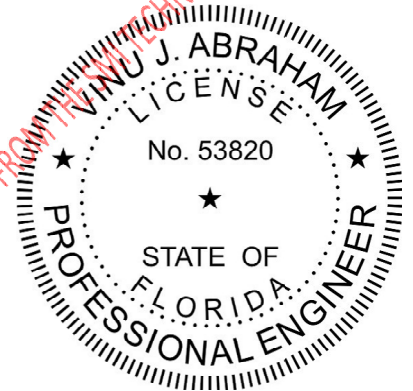


Digitally Signed by: Vinu Abraham

Date: 2018.08.14 18:35:56
-04'00'

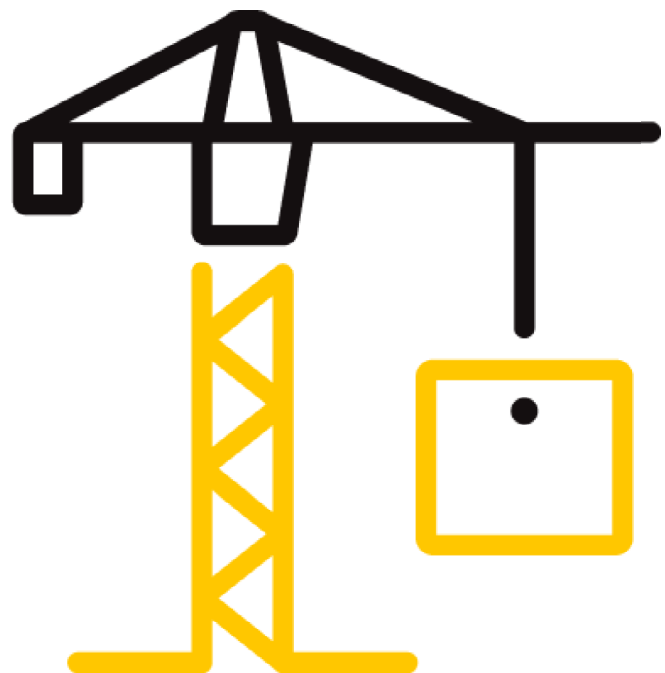

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

REPORT ISSUED TO SHEFFIELD METALS

5467 Evergreen Parkway
Sheffield Village, OH 44054


SECTION 1 SCOPE

Intertek Building & Construction (B&C) was contracted by Sheffield Metals, 5467 Evergreen Parkway, Sheffield Village, OH 44054, to perform testing in accordance with UL 580, *Standard for Safety, Tests for Uplift Resistance of Roof Assemblies*, on their 0.040" Aluminum 1-3/4" SnapLock roof panels. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted at Intertek test facility in West Palm Beach, Florida. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.


SECTION 2 SUMMARY OF TEST RESULTS

Product Type: Metal Roof Panel
Series/Model: 0.040" Aluminum 1-3/4" SnapLock
Specimen 1 - Ultimate Test Load Achieved: -122 psf
Specimen 2 - Ultimate Test Load Achieved: -122 psf

For INTERTEK B&C:

COMPLETED BY: Melissa Nuttall
Technician Team Leader - Product
TITLE:
SIGNATURE: 
Digitally Signed by: Melissa Nuttall
DATE: 08/14/18

mmn:ab

REVIEWED BY: Vinu Abraham, P.E.
Vice President – Global Business Development
TITLE:
SIGNATURE: 
Digitally Signed by: Vinu Abraham
DATE: 08/14/18

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 3

TEST METHOD(S)

The specimens were evaluated in accordance with the following:

UL 580, *Standard for Safety, Tests for Uplift Resistance of Roof Assemblies*, Underwriters Laboratories, Inc. (Fifth Edition November 2, 2006, revised through July 9, 2009).

ASTM E8/E8m-16a, *Standard Test Method for Tension Testing of Metallic Materials*.

SECTION 4

MATERIAL SOURCE/INSTALLATION

The test specimen was provided by the client. Representative samples of the test specimen will be retained by Intertek B&C for a minimum of four years from the test completion date. Installation of the tested product was performed by the client.

SECTION 5

EQUIPMENT

Cycling and Static Load Mechanism: Computer controlled centrifugal blowers with electronic pressure measuring device

Deflection Measuring Device: Transit and steel scales

SECTION 6

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Veron Wickham	Intertek B&C
Melissa Nuttall	Intertek B&C
Felipe Morales	Intertek B&C
Vinu Abraham, P.E.	Intertek B&C
Alan Rule	Intertek B&C

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 7

TEST PROCEDURE

This test evaluates the comparative resistance of roof assemblies to positive and negative pressures by simulating the effects of wind gusts by use of oscillating exterior pressure and constant interior pressures. One assembly was tested per UL 580 at each class rating. (Reference Chart No. 1 for test pressures and load durations.) The measurements were taken via a transit and steel scales mounted to the roof panels. The initial measurements were "zero" point, not actual deflection. Actual deflection is Phase 1, 2, 3 minimum, 3 maximum, 4 or 5 reading less the initial (0.0 psf) reading. The final reading was taken after the completion of an entire class had been completed and became the initial reading for the following class test.

		NEGATIVE PRESSURE		POSITIVE PRESSURE	
TEST PHASE	DURATION minutes	POUNDS PER SQUARE FOOT psf (kPa)	INCHES OF WATER inches (mm)	POUNDS PER SQUARE FOOT psf (kPa)	INCHES OF WATER inches (mm)
Class 30					
1	5	16.2 (0.79)	3.1 (79)	0.0 (0.00)	0.0 (0)
2	5	16.2 (0.79)	3.1 (79)	13.8 (0.66)	2.7 (69)
3	60	8.1 - 27.7 (0.39 - 1.33)	1.5 - 5.3 (38 - 135)	13.8 (0.66)	2.7 (69)
4	5	24.2 (1.16)	4.7 (119)	0.0 (0.00)	0.0 (0)
5	5	24.2 (1.16)	4.7 (119)	20.8 (1.00)	4.0 (102)
Class 60					
1	5	32.3 (1.55)	6.2 (157)	0.0 (0.00)	0.0 (0)
2	5	32.3 (1.55)	6.2 (157)	27.7 (1.33)	5.3 (135)
3	60	16.2 - 55.4 (0.79 - 2.66)	3.1 - 10.7 (79 - 272)	27.7 (1.33)	5.3 (135)
4	5	40.4 (1.94)	7.8 (198)	0.0 (0.00)	0.0 (0)
5	5	40.4 (1.94)	7.8 (198)	34.6 (1.66)	6.7 (170)
Class 90 (maximum combined uplift pressure of 105 psf)					
1	5	48.5 (2.33)	9.3 (236)	0.0 (0.00)	0.0 (0)
2	5	48.5 (2.33)	9.3 (236)	41.5 (1.99)	8.0 (203)
3	60	24.2 - 48.5 (1.16 - 2.33)	4.7 - 9.3 (119 - 236)	41.5 (1.99)	8.0 (203)
4	5	56.5 (2.71)	10.9 (277)	0.0 (0.00)	0.0 (0)
5	5	56.5 (2.71)	10.9 (277)	48.5 (2.33)	9.3 (236)

Chart No. 1
UL 580 Load Table Test Pressures

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 8

TEST SPECIMEN DESCRIPTION

Product Type: Metal Roof Panel

Series/Model: 0.040" Aluminum 1-3/4" SnapLock

Specimen 1 - Ultimate Test Load Achieved: -122 psf

Specimen 2 - Ultimate Test Load Achieved: -122 psf

Product Size(s):

All Test Specimens

OVERALL AREA:	WIDTH		LENGTH	
	millimeters	inches	millimeters	inches
9.3 m ² (100.0 ft ²)				
Overall Size	3048	120	3048	120
Panel Coverage	406	16	3048	120

The following descriptions apply to all specimens except as noted.

Test Deck Construction:

The 10' 0" wide by 10' 0" long by 1' 3" deep test frame was fabricated from C15 by 33.9 steel channels. Two purlins were fabricated from C6 x 10.5 steel channels. The purlins were located 32" from each end of the test frame.

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

Specimen #1 Roof System:

COMPONENTS	DETAILS	ATTACHMENT METHOD
Type "B" roof decking	Single layer of 22 gauge steel roof decking, each panel measuring 120" long, 1-1/2" high and 36" wide.	The B-decking was attached to the steel structural support frame using #12 x 1-1/4" Tek 3 HWH screws spaced at 6" on center along the intermediate members, overlaps and around the perimeter.
30# Asphalt saturated organic paper	A single layer was used with a 4" overlap between adjacent sheets.	The felt paper was attached using a single #10 x 1" screw through the rib of the "B" decking at each of the four corners of the test frame. The felt paper was secured by the clips and corresponding fasteners.
Clips	The 1.86" high x 2.032" wide x 3.50" long clips were constructed from 18 Ga steel.	The clips were spaced at 18" on center and secured using two #14 x 3" pancake head fasteners per clip.
1-3/4" SnapLock Panel	The panels were constructed from 0.040" aluminum and had a 16" coverage width. Six full and two partial width panels were tested.	The male leg of the panel were secured using clips spaced 18" on center. The female leg of the panel snap-fit to the male leg of the adjacent panel. The perimeter was secured using #14 x 3" pancake head fasteners spaced 3" on center.

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

Specimen #2 Roof System:

COMPONENTS	DETAILS	ATTACHMENT METHOD
Type "B" roof decking	22 gauge steel roof decking, measuring 120" long, 1-1/2" high and 36" wide with ribs 3-1/2" wide.	The B-decking was attached to the steel structural support frame using #12 x 1-1/4" Tek 3 HWH screws spaced at 6" on center along the intermediate members, overlaps and around the perimeter.
Insulation panel	One layer of 1" thick, 4' x 4' sheets of closed cell polyisocyanurate Johns Manville foam.	Each insulation panel was attached using four #14 x 3" pancake head screws with bearing plates.
30# Asphalt saturated organic paper	A single layer of felt paper, lapped four inches, attached to the B-deck substrate through the insulation.	The felt paper was secured by the #14 x 3" pancake head screws with bearing plates used to install the insulation panels.
Clips	The 1.86" high x 2.032" wide x 3.50" long clips were constructed from 18 Ga steel.	The clips were spaced at 18" on center and secured using two #14 x 3" pancake head fasteners per clip.
1-3/4" SnapLock Panel	The panels were constructed from 0.040" aluminum and had a 16" coverage width. Six full and two partial width panels were tested.	The male leg of the panels were secured using clips spaced 18" on center. The female leg of the panels snap-fit to the male leg of the adjacent panels. #14 x 3" pancake head fasteners were used at the perimeter of the panels spaced 3" on center.

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 9

TEST RESULTS

The temperature during testing was 19°C (67°F). The results are tabulated as follows.

Test Specimen #1

TEST TITLE	OBSERVATIONS	DEFLECTION MEASUREMENTS	RESULTS
Class 30, Phases 1-5	No visible damage to system	Reference Table No. 1	PASSED
Class 60, Phases 1-5	No visible damage to system	Reference Table No. 1	PASSED
Class 90, Phases 1-5	No visible damage to system	Reference Table No. 1	PASSED
Supplemental Loads -112 psf to -122 psf	No visible damage to system	Reference Table No. 2	PASSED
Supplemental Loads -132 psf	Seam separated	Reference Table No. 2	FAILED

Test Specimen #2

TEST TITLE	OBSERVATIONS	DEFLECTION MEASUREMENTS	RESULTS
Class 30, Phases 1-5	No visible damage to system	Reference Table No. 3	PASSED
Class 60, Phases 1-5	No visible damage to system	Reference Table No. 3	PASSED
Class 90, Phases 1-5	No visible damage to system	Reference Table No. 3	PASSED
Supplemental Loads -112 psf to -122 psf	No visible damage to system	Reference Table No. 4	PASSED
Supplemental Loads -132 psf	Seam separated	Reference Table No. 4	FAILED

Notes:

Reference Chart No. 1 for test pressures and load durations.

Reference Sketch No. 1 for location of deflection measurement devices.

Deflection measurements are included in Table Nos. 1 through 4.

A loose fitting, pleated 2-mil plastic film was utilized to assist in obtaining uniform pressure on the roof system. The plastic film was located between the moisture barrier and the roof panels to facilitate testing. In our opinion, this did not influence test results.

Supplemental Loads were applied in 10 psf increments and held for one minute duration as modified from the procedures of UL 1897-2004 (Revised 2008) Uplift Tests for Roof Covering Systems

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

TENSILE TEST RESULTS

Tensile tests were conducted on two specimens from each panel sample. The specimens were machined from the metal members to the dimensions of the sheet-type 0.5" wide specimen given in Figure 1 of ASTM E8. The coating on the specimens was removed from the reduced section prior to testing. Tensile properties were determined utilizing a Satec Universal Test Machine (ICN: Y002011) equipped with a 5,000 pound load cell (ICN: 65607) and a Class C extensometer (ICN: Y002015). The test was run at a crosshead speed of 0.2 in/min.

Specimen No.	Base Thickness (in)	Yield Strength (ksi)	Tensile Strength (ksi)	Modulus of Elasticity (ksi)	Reduction of Area (%)	Elongation (%)
1	0.0298	24.3	28.1	11,401	11	7.9
2	0.0298	24.4	28.2	11,211	10	8.6
Average		24.3	28.1	11,306	11	8.3
Std. Dev.		0.073	0.039	134.4	0.90	0.46

SECTION 10

CONCLUSION

The 0.040" Aluminum 1-3/4" SnapLock panels tested per UL 580 achieved an ultimate test load of:

Specimen 1: -122 psf

Specimen 2: -122 psf


TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 11

SKETCH(ES)

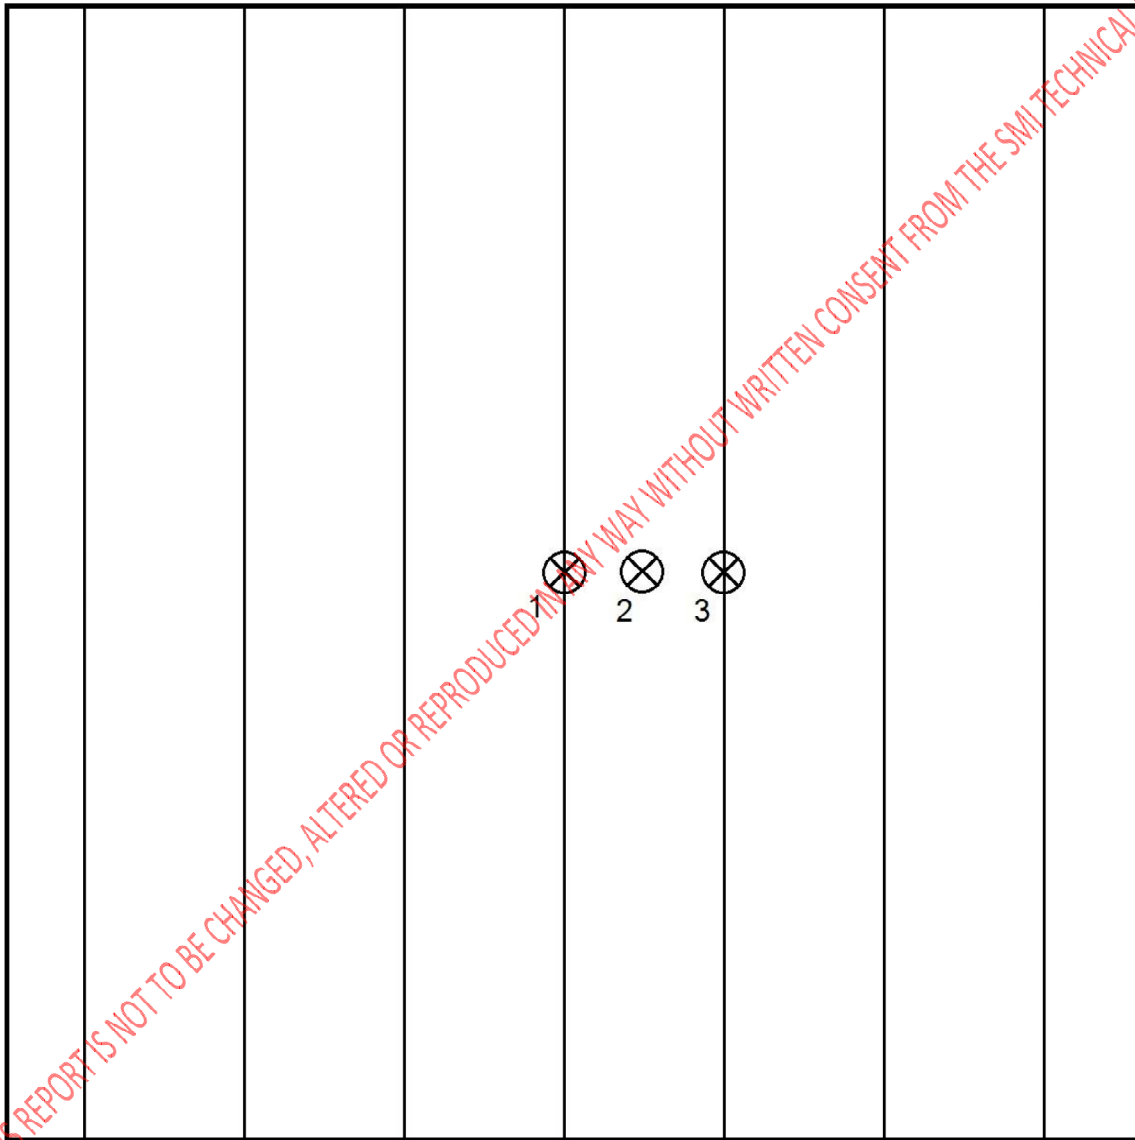

Sketch No. 1
Deflection Measurement Device Locations

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 12

TABLES

CLASS	PHASE	DEFLECTION MEASUREMENTS (inches)		
		INDICATOR		
		#1	#2	#3
30	Initial (0.0 psf)	3.5	3.3	3.4
	1	3.8	4.5	3.8
	2	4.1	5.0	4.1
	3 Minimum	4.0	4.8	3.8
	3 Maximum	4.1	5.2	4.0
	4	4.1	4.9	3.9
	5	4.2	5.4	4.1
	Final (0.0 psf)	3.7	3.4	3.5
60	Initial (0.0 psf)	3.7	3.4	3.5
	1	4.1	4.1	4.0
	2	4.3	4.3	4.3
	3 Minimum	4.3	4.3	4.2
	3 Maximum	4.5	4.5	4.4
	4	4.2	4.2	4.1
	5	4.5	4.5	4.4
	Final (0.0 psf)	3.7	3.7	3.5
90	Initial (0.0 psf)	3.7	3.7	3.5
	1	4.3	4.3	4.2
	2	4.5	4.5	4.5
	3 Minimum	4.3	4.3	4.3
	3 Maximum	4.4	4.4	4.4
	4	4.3	4.3	4.2
	5	4.6	4.6	4.7
	Final (0.0 psf)	3.7	3.7	3.5

Table No. 1
Specimen #1 Deflection Measurements

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

VACUUM (psf)	UPLIFT (psf)	LOAD (psf)	SUPPLEMENTAL DEFLECTION MEASUREMENTS (inches)		
			INDICATOR		
			#1	#2	#3
-48.5	-63.5	-112	4.6	6.7	4.6
-48.5	-73.5	-122	4.7	6.9	4.7
-48.5	-83.5	-132	Failed		

Table No. 2

Specimen #1 Supplemental Deflection Measurements

Note: Supplemental Loads were applied in 10 psf increments and held for one minute duration as modified from the procedures of UL 1897-2004 (Revised 2008) Uplift Tests for Roof Covering Systems

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

CLASS	PHASE	DEFLECTION MEASUREMENTS (inches)		
		INDICATOR		
		#1	#2	#3
30	Initial (0.0 psf)	4.4	4.5	*
	1	4.6	5.5	*
	2	4.8	6.0	*
	3 Minimum	4.8	6.0	*
	3 Maximum	4.9	6.3	*
	4	4.7	6.0	*
	5	4.9	6.4	*
	Final (0.0 psf)	4.4	4.5	*
60	Initial (0.0 psf)	4.4	4.5	*
	1	4.8	6.3	*
	2	5.1	6.8	*
	3 Minimum	5.0	6.7	*
	3 Maximum	5.3	7.3	*
	4	4.9	6.5	*
	5	5.2	7.1	*
	Final (0.0 psf)	4.4	4.5	*
90	Initial (0.0 psf)	4.4	4.5	*
	1	5.0	6.7	*
	2	5.4	7.3	*
	3 Minimum	5.1	7.1	*
	3 Maximum	5.4	7.3	*
	4	5.1	6.9	*
	5	5.5	7.6	*
	Final (0.0 psf)	4.4	4.5	*

Table No. 3
Specimen #2 Deflection Measurements

*Gauge Error

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

VACUUM (psf)	UPLIFT (psf)	LOAD (psf)	SUPPLEMENTAL DEFLECTION MEASUREMENTS (inches)		
			INDICATOR		
			#1	#2	#3
-48.5	-63.5	-112	5.6	7.7	*
-48.5	-73.5	-122	5.7	8.0	*
-48.5	-83.5	-132	Failed		

Table No. 4

Specimen #2 Supplemental Deflection Measurements

*Gauge Error

Note: Supplemental Loads were applied in 10 psf increments and held for one minute duration as modified from the procedures of UL 1897-2004 (Revised 2008) Uplift Tests for Roof Covering Systems

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 13

DRAWINGS


The test specimen drawings have been reviewed by Intertek B&C and are representative of the test specimen(s) reported herein. Test specimen construction was verified by Intertek B&C per the drawings included in this report. Any deviations are documented herein or on the drawings.

THIS REPORT IS NOT TO BE CHANGED, ALTERED OR REPRODUCED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THE SMI TECHNICAL DEPT.

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

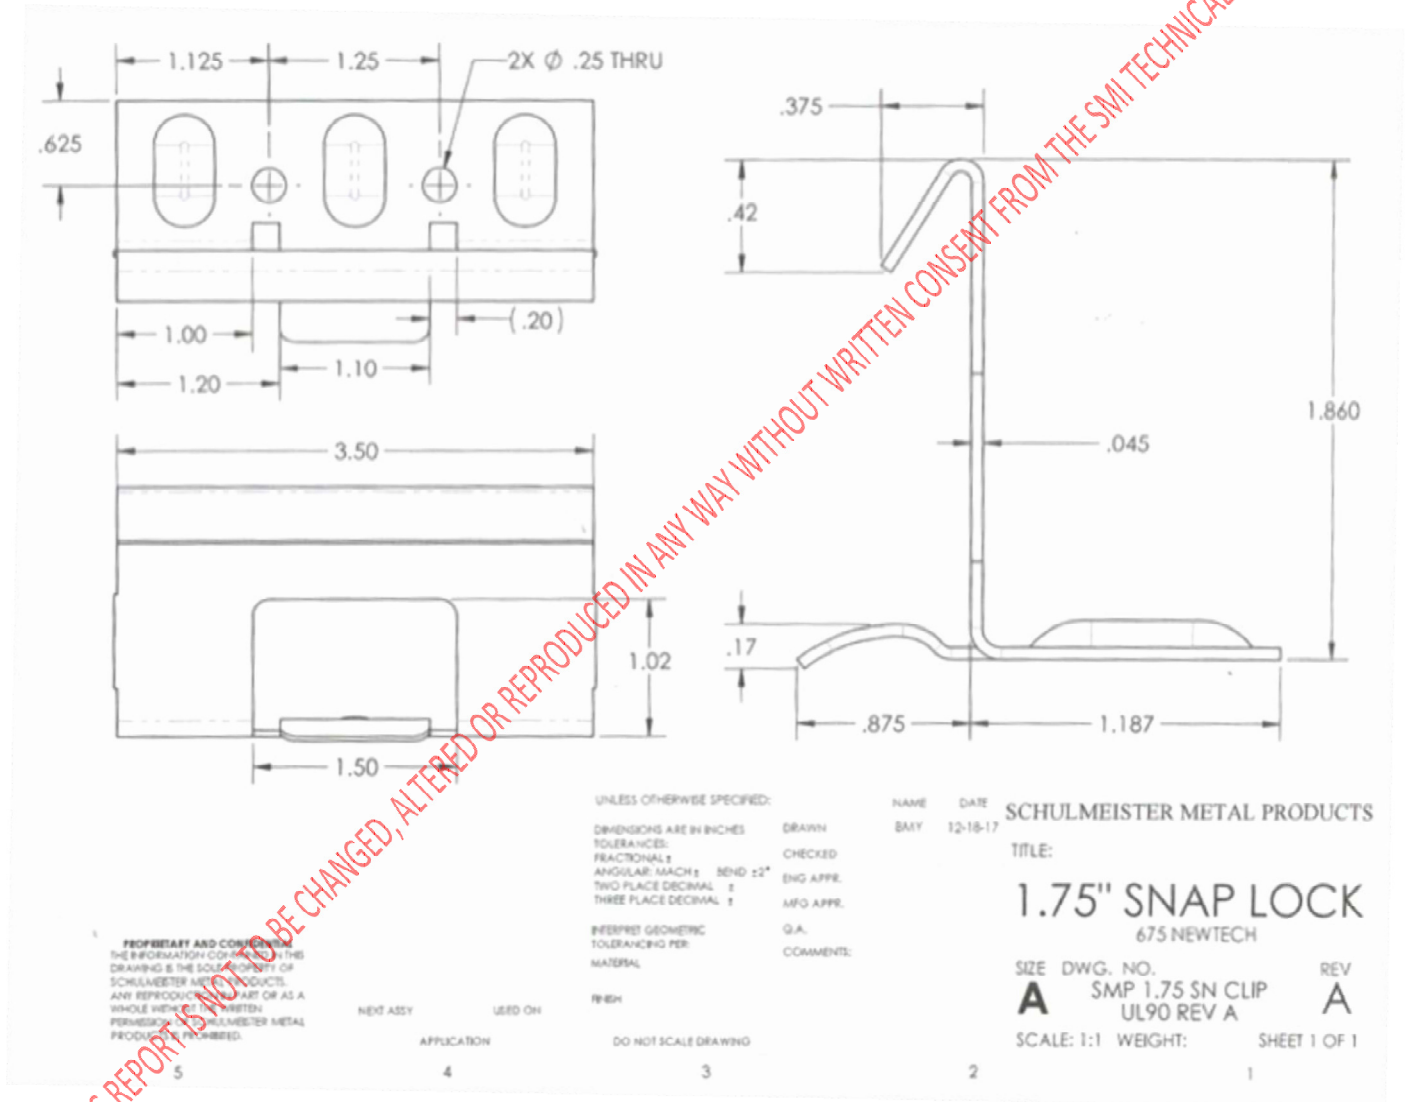


Drawing No. 1
Clip Details

TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

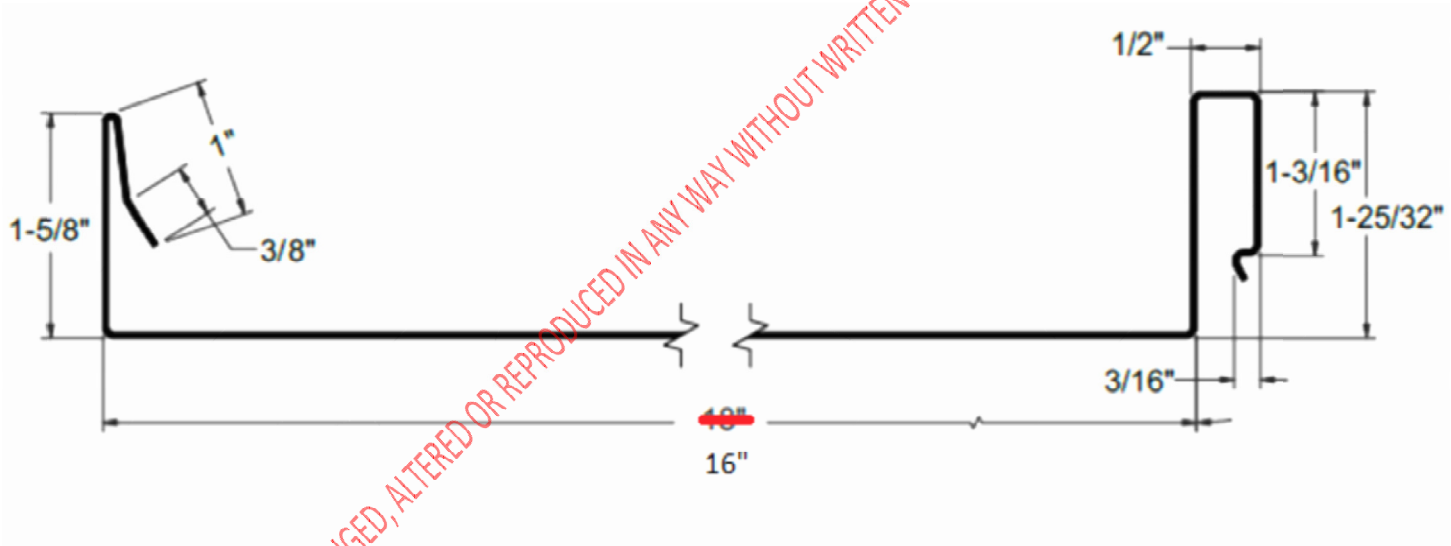

Drawing No. 2
Panel Details



TEST REPORT FOR SHEFFIELD METALS

Report No.: I3448.02-450-44 R0

Date: 08/14/18

SECTION 14

REVISION LOG

REVISION #	DATE	PAGES	REVISION
0	08/14/18	N/A	Original Report Issue

THIS REPORT IS NOT TO BE CHANGED, ALTERED OR REPRODUCED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THE SMI TECHNICAL DEPT.