

**ASTM E 2140
TEST REPORT**

Rendered to:



SHEFFIELD METALS INTERNATIONAL

**MODEL DESIGNATION: SMI 2" Mechanical Seam over Plywood
PRODUCT TYPE: Standing Seam Roof System (24 Ga. Steel)**

This report contains in its entirety:

Cover Page: 1 page

Report Body: 5 pages

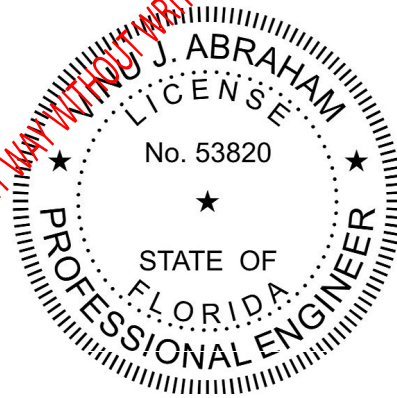

Digitally Signed by: Vinu Abraham

2012.03.12 17:30:26

-04'00'

THIS REPORT IS NOT TO BE CHANGED, ALTERED OR REPRODUCED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THE SMI TECHNICAL DEPT.

Report No.: B5170.24-450-18
Test Date: 2/15/12
Report Date: 3/2/12
Test Report Retention End Date: 3/2/16



Sheffield Metals International

SMI 2" Mechanical Seam over Plywood (ASTM E 2140)

Test Report #: B5170.24-450-18

1.0 MANUFACTURER'S IDENTIFICATION

- 1.1 Name of Applicant: Sheffield Metals International
5467 Evergreen Parkway
Sheffield Village, OH 44054
Voice: 904.413.7425
- 1.2 Contact Person: Jim Mitchell

2.0 LABORATORY IDENTIFICATION

- 2.1 Test Notification #: N/A
- 2.2 Lab Certifications: Miami-Dade County (05-1014-01); Florida Building Code (TST1527); IAS (TL-244); AAMA; WDMA; Keystone Certifications; Texas Department of Insurance

3.0 SCOPE OF WORK

- 3.1 Introduction: Sheffield Metals International retained Architectural Testing, Inc. (ATI) to conduct water infiltration testing on their SMI 2" Mechanical Seam over Plywood System per the requirements of ASTM.
- 3.2 Report Information: Table 1 provides the test date for this specimen.

Table 1: Specimen Test Date

Mock-Up	Specimen #	Test Date
SMI 2" Mechanical Seam over Plywood	7C	2/15/2012

4.0 PRODUCT IDENTIFICATION

- 4.1 Product Type: Standing Seam Roof System
- 4.2 Model Designation: SMI 2" Mechanical Seam over Plywood
- 4.3 Overall Size: 69" (wide) x 113" (long) – Structural roof frame
- 4.4 General Description: This specimen consisted of a 69" x 113" structural roof frame fabricated from 2x (nominal) wood with intermediate rafters spaced 24" on center. This assembly was sheathed with a single layer of 1/2" (nominal) structural CDX Plywood. This was followed by a single layer each of felt paper and moisture/fire barrier. The roofing panels were fastened over the moisture/fire barrier.
- 4.5 Sample Source: Sheffield Metals provided the test specimen.



5.0 COMPONENT DESCRIPTION

5.1 Structural Support Frame:

Table 2 provides the structural support frame components used for the test specimen.

Table 2: Structural Support Frame Components

Item	Description
Intermediate rafters	There were four (4) intermediate rafters used in this specimen - spaced 24" on center - that were each fabricated from 2x southern Yellow Pine timber planks.
Plywood substrate	A single layer of 1/2" (minimum 15/32" thick) CDX Plywood was utilized across the entire surface of this specimen.

5.2 Accessories:

Table 3 provides a description of the accessories used in the test specimen.

Table 3: Accessories

Item	Description
Felt paper	30# Asphalt saturated organic paper (ASTM D226) meeting type II requirements
Moisture/fire barrier	VersaShield®
Sealant	TFC 100™ High Performance Commercial Grade Sealant

5.3 Metal Roof System:

Table 4 provides the metal roof system components used in the test specimen.

Table 4: Metal Roof System Components

Item	Overall Cross-Section	Material	Coil Width	Description
Mechanical Seam Panel	Please see part drawing labeled "SMF 2" Mechanical Seam" for dimensions	24 ga. steel	24"	Each panel had an effective covering width of 18". Each finished roof panel was 111" (long) and featured two (2), 2" vertical legs (one w/return flap).
Clip Assembly (Butterfly Base 2" - Part # 1126600)	2.000" x 1.750" x 4.500" (long)	18 ga. G-90 galvanized steel	N/A	Each expansion-type butterfly panel clip consisted of a "base" and a "tab" that were each fabricated from two different thickness of steel. Each clip "base" had two holes capable of accommodating #10 pancake head screws.
Clip Assembly (Butterfly Tab 2" - Part # 1103097)	5.000" (long) x 0.900" (tall) with two return flaps that were 0.400" (wide)	22 ga. G-90 galvanized steel	N/A	



6.0 SPECIMEN CONSTRUCTION

6.1 Specimen Construction:

Table 5 provides the specimen construction.

Table 5: Specimen Construction

Location	Description
Plywood sheathing to structural support frame	2-1/2" x .131" EG ring shank nails spaced 4" on center at the perimeter
	2-1/2" x .131" EG ring shank nails spaced 6" on center at the field
Felt paper	A single layer of felt paper with 4" laps attached to the plywood substrate with 0.120" x 1-1/4" galvanized smooth shank roofing nails with 32-ga tin caps
	Spaced 8" on center (staggered) at the field
	Spaced 5" on center at the top and bottom of the specimen
	Spaced 7" on center at the sides of the specimen
	Spaced 6" on center at the overlap locations
Moisture/fire barrier	A single layer of VersaShield® with 4" laps was tacked in place across the top of the felt paper and was secured when the metal roofing was installed.
Roof panel	Each of the finished roof panels (three [3] full and one [1] partial) featured an inside leg and an outside leg. These legs were overlapped around a butterfly clip base/tab assembly. These clip assemblies were spaced 4" and 24" from each panel end and at 24" on center thereafter. Each clip was mechanically attached to the plywood substrate using two (2), #10 x 1" Weather Gard® pancake head screws (Type A). The legs were then mechanically seamed 180 degrees.
Sealant	A 1/8" bead of TFC 100 High Performance Commercial Grade Sealant was applied to the first 90 degree bend closest to the vertical leg of the female side of each roof panel. The perimeter of the panel assembly was fully sealed to the structural support frame.
Panel edges	The panel edges at the perimeter of the roof panel assembly were attached to the plywood substrate using a single row of #10 x 1" Weather Gard® pancake head screws (Type A) spaced at 6" on center.
Panel ends	The panel ends at the perimeter of the roof panel assembly were attached to the plywood substrate using a single row of #10 x 1" Weather Gard® pancake head screws (Type A) spaced at 4" on center.

7.0 TEST RESULT SUMMARY

Table 6 provides a summary of the test results for tests conducted per ASTM E 2140.

Table 6: Summary of Test Results

Specimen #	Test Method	Conclusion
7C	Water Infiltration Test (ASTM E2140)	PASS



8.0 TEST SEQUENCE

Table 7 provides the test sequence for the specimen.

Table 7: Test Sequence

Specimen # 7C
1. Water Infiltration Test

9.0 TEST RESULTS

9.1 Water Infiltration Test

9.1.1 Results

Table 4 provides the results for the water infiltration test.

Table 2: Water Infiltration Test Results

Test Duration (hours)	Water Pressure Head (in.)	Conclusion
1	6 +/-0.2	Pass
3	6 +/-0.2	
6	6 +/-0.2	

9.1.2 Conclusion

ATI observed zero (0) water infiltration through the test specimen; as such, this test specimen satisfies the requirements of ASTM E 2140.

10.0 CERTIFICATION AND DISCLAIMER STATEMENT

All tests performed on this test specimen were conducted in accordance with the specifications of the applicable codes, standards and test methods listed below by ATI. ATI does not have, nor does it intend to acquire or will it acquire, a financial interest in any company manufacturing or distributing products tested at ATI. ATI is not owned, operated or controlled by any company manufacturing or distributing products it tests. This report is only intended for the use of the entity named in Section 1.0 of this report. Detailed assembly drawings showing panel/clip thicknesses, panel/clip profiles, accessories, fasteners and all other applicable layouts are on file and have been compared to the test specimen submitted. ATI will service this report for the entire test record retention period. Test records that are retained such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation will be retained by ATI for the entire test record retention period.

If test specimen contains glazing, no conclusions of any kind regarding the adequacy or inadequacy of the glass in any glazed test specimen can be made. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. It is the exclusive property of the client so named herein and relates only to the specimen tested. This report may not be reproduced, except in full, without the written approval of ATI.

11.0 APPLICABLE CODES, STANDARDS, AND TEST METHODS

ASTM E 2140 – Standard Test Method for Water Penetration of Metal Roof Panel Systems by Static Water Pressure Head



Architectural Testing ARCHTEST.COM

6655 Garden Road
Riviera Beach, FL 33404
P: 888.477.2454
F: 561.881.0075

Test Report #: B5170.24-450-18
Report Date: 3/2/2012
Test Report Retention End Date: 3/2/2016
Specimen #: 7C
Page: 5 of 5

12.0 WITNESSES (ALL OR PARTIAL)

Vinu J. Abraham, P.E.
Jeff McGovern
Kristin Norville, E.I.
John Spallina

Vice President – Southeast Region
Director – Regional Operations
Operations Engineer
Technician

ATI
ATI
ATI
ATI

THIS REPORT IS NOT TO BE CHANGED, ALTERED OR REPRODUCED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THE SMI TECHNICAL DEPT.

ENGINEER OF RECORD

Digitally Signed by: Vinu Abraham

Vinu J. Abraham, P.E.

3/2/2012

REPORT WRITER

Digitally Signed by: Angela Abramczyk

Angela Abramczyk

3/2/2012