



PRI Construction Materials Technologies LLC

6412 Badger Drive

Tampa, FL 33610

813.621.5777

<https://www.pri-group.com/>

Laboratory Test Report

Report for: Jeff Hock
Sheffield Metals International
5467 Evergreen Parkway
Sheffield Village, OH 44054

Product Name: .040 Al SMI 1.75" Snap Lock

Project No.: 1802T0001

Date(s) Tested: Oct. 23, 2020

Test Methods: FBC (HVHZ) TAS 100-95

Results Summary: Compliant with FBC (HVHZ) TAS 100-95

Purpose: Determine the wind and wind-driven rain resistance for the specified roof covering in accordance with **Florida Building Code Test Protocols for the High Velocity Hurricane Zone (HVHZ) Testing Application Standard (TAS) No. 100: Test Procedure for Wind and Wind Driven Rain Resistance of Discontinuous Roof Systems.**

Test Methods: Testing was conducted as described in Florida Building Code Test Protocols for the High Velocity Hurricane Zone (HVHZ) Testing Application Standard (TAS) No. 100-95: *Test Procedure for Wind and Wind Driven Rain Resistance of Discontinuous Roof Systems.*

Sampling: The following materials were received by PRI.

<u>Product</u>	<u>Source</u>	<u>Date</u>	<u>Sampling</u>
.040 AL SMI 1.75" Snap Lock	Clearwater, FL	Sep. 21, 2020	Modern Metals
1-3/4" SnapLock Clip	Orange Park, FL	Oct. 1, 2020	Sheffield
#10-13 x 1" PH screws	Acworth, GA	Sep. 22, 2020	Sheffield
Eave Trim	Clearwater, FL	Sep. 21, 2020	Modern Metals
Valley Pan	Clearwater, FL	Sep. 21, 2020	Modern Metals
Offset Cleat	Clearwater, FL	Sep. 21, 2020	Modern Metals
Z closure	Clearwater, FL	Sep. 21, 2020	Modern Metals
Gable cleat	Clearwater, FL	Sep. 21, 2020	Modern Metals
Gable Flashing	Clearwater, FL	Sep. 21, 2020	Modern Metals
Cleat	Clearwater, FL	Sep. 21, 2020	Modern Metals

All other roofing components were procured by PRI Construction Materials Technologies LLC through local distribution.

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Conditioning: The prepared test deck was conditioned for 16h at 135-140°F. After conditioning, test deck was allowed to equilibrate to ambient conditions.

Product Descriptions: SMI 1.75" Snap Lock: 0.040" Fluropon® coated 3105 H22 aluminum; 1.75" snap lock standing seam; 12" wide coverage;
1-3/4" SnapLock Clip: 18 ga. G90 galvanized steel in-seam clip
#10 x 1" PH screws: #10-13 X 1" coated, pan head screw

Result: Testing was performed at ambient conditions at a 2:12 roof slope. Requisite manufacturer's drawings are contained in Appendix A. Requisite photograph(s) are contained in Appendix B. Requisite calibration documentation is provided in Appendix C.

Component:	Description	Attachment	Additional Detail	TAS 100 Result [Pass/Fail]
Deck:	15/32" APA span rated CDX plywood sheathing over nominal No. 2 wood trusses at 24" o.c.	8d x 2-1/2" ring shank nails	6" o.c. at ends 12" o.c. along intermediates	Pass
Underlayment:	ASTM D226 Type II roofing felt with 4" wide side laps	32 ga. x 1-5/8" Ø tin caps with 12 ga. x 1-1/4" ring shank nails	Fasteners installed 6" o.c. in laps and 12" o.c. in two, staggered rows in the field of the roll. At the valley, the underlayment was woven by extending 12" past valley centerline.	
Roof Covering:	0.040" Al, SMI 1.75" SnapLock 1-3/4" SnapLock Clip	#10 x 1" PH screws	#10 x 1" PH screws installed two (2) per clip, clips placed 6" o.c.	
Eave Detail:	Eave Trim	#10-13 x 1" PH screws	#10-13 x 1" PH screws placed 6" o.c. SMI 1.75" SnapLock panels were hemmed around eave metal	
Rake Detail:	Gable Flashing Z Closure Facia cleat	#10-13 x 1" PH screws	Facia cleat was installed using #10-13x1" PH screws placed 6" o.c. Z Closure was installed using #10-13x1" PH screws placed 6" o.c. sealed to panel using 3/16" x 7/8" Butyl tape. Gable flashing installed using Pop rivets installed 18" o.c.	
Valley Detail:	0.040" Al, painted steel, preformed "W" Valley	0.040" Al Offset Cleat with #10-13 x 1" PH screws	Cleat/Fasteners installed 6" o.c. along the edge of the valley, 6" from valley center with butyl sealant installed under attached leg of offset cleat. 0.040 Aluminum SMI 1.75" SnapLock panels hemmed around Offset Cleat ASTM C920 sealant installed at valley ends of panels to fill openings. Valley metal hemmed around Eave and Gable Trim.	

1802T0001


The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Observations:

Interval	Test Condition	Result
1	Wind Speed: 35 mph Water Spray: 8.8in/h Duration: 15 min	Wind Speed: No panel displacement Water Spray: No Water infiltration
2	Wind Speed: 0 mph Water Spray: Off Duration: 10 min	Wind Speed: No panel displacement Water Spray: No Water infiltration
3	Wind Speed: 70 mph Water Spray: 8.8in/h Duration: 15 min	Wind Speed: No panel displacement Water Spray: No Water infiltration
4	Wind Speed: 0 mph Water Spray: Off Duration: 10 min	Wind Speed: No panel displacement Water Spray: No Water infiltration
5	Wind Speed: 90 mph Water Spray: 8.8in/h Duration: 15 min	Wind Speed: No panel displacement Water Spray: No Water infiltration
6	Wind Speed: 0 mph Water Spray: Off Duration: 10 min	Wind Speed: No panel displacement Water Spray: No Water infiltration
7	Wind Speed: 110 mph Water Spray: 8.8in/h Duration: 5min	Wind Speed: No panel displacement Water Spray: No Water infiltration
8	Wind Speed: 0 mph Water Spray: Off Duration: 10 min	Wind Speed: No panel displacement Water Spray: No Water infiltration

Statement of Compliance: The test deck constructed complies with all the requirements of **Florida Building Code Test Protocols for the High Velocity Hurricane Zone (HVHZ) Testing Application Standard (TAS) No. 100: Test Procedure for Wind and Wind Driven Rain Resistance of Discontinuous Roof Systems**. The laboratory test results presented in this report are representative of the materials supplied.

Signed:


Zachary R. Priest
Florida Registered Professional Engineer
P.E. Number: 74021

Date:

11/13/2020

Report Issue History:



Issue #	Date	Pages	Revision Description (if applicable)
Original	11/13/2020	12	NA

APPENDIX FOLLOWS

1802T0001


The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Appendix A: Panel and Clip Drawings

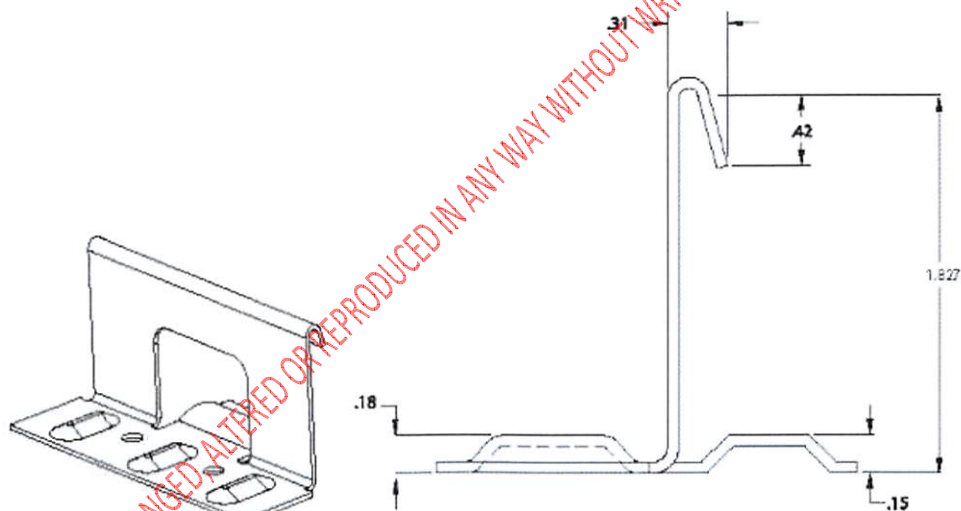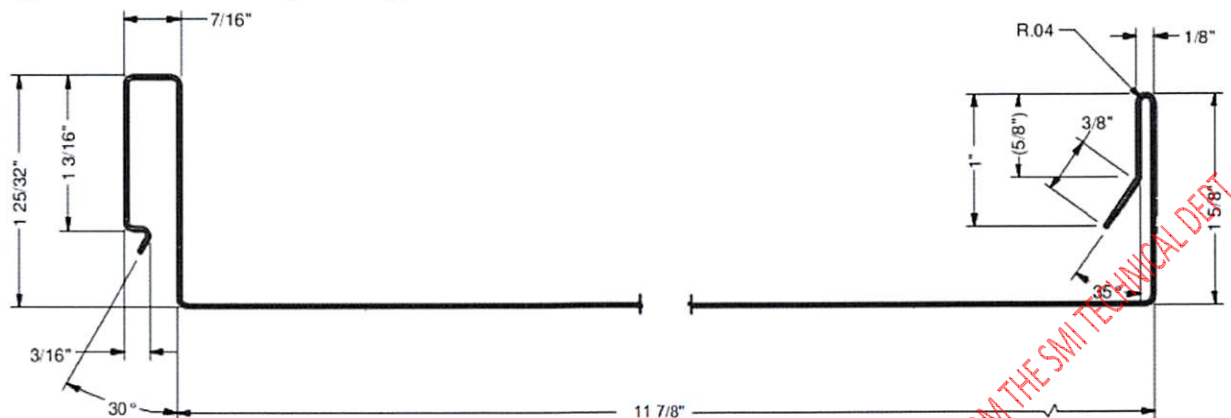

1802T0001


The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

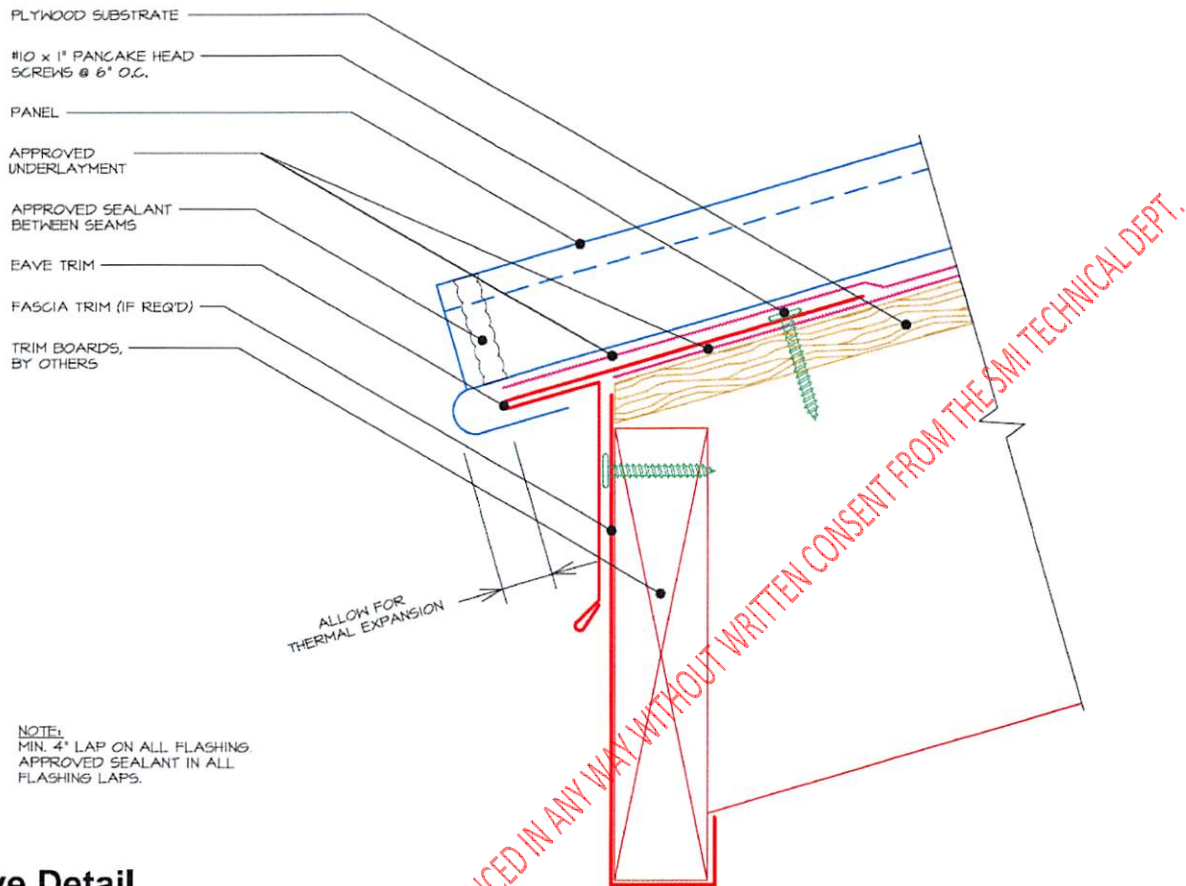

Eave Detail

1802T0001


The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

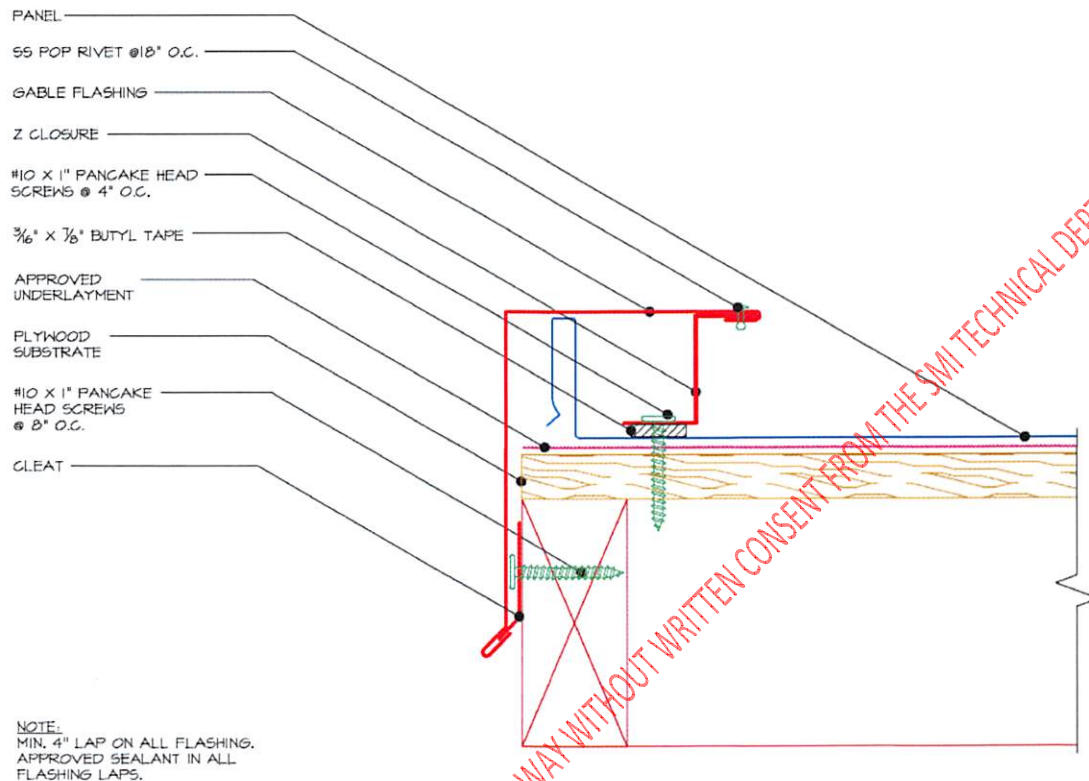

Rake / Gable Detail

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

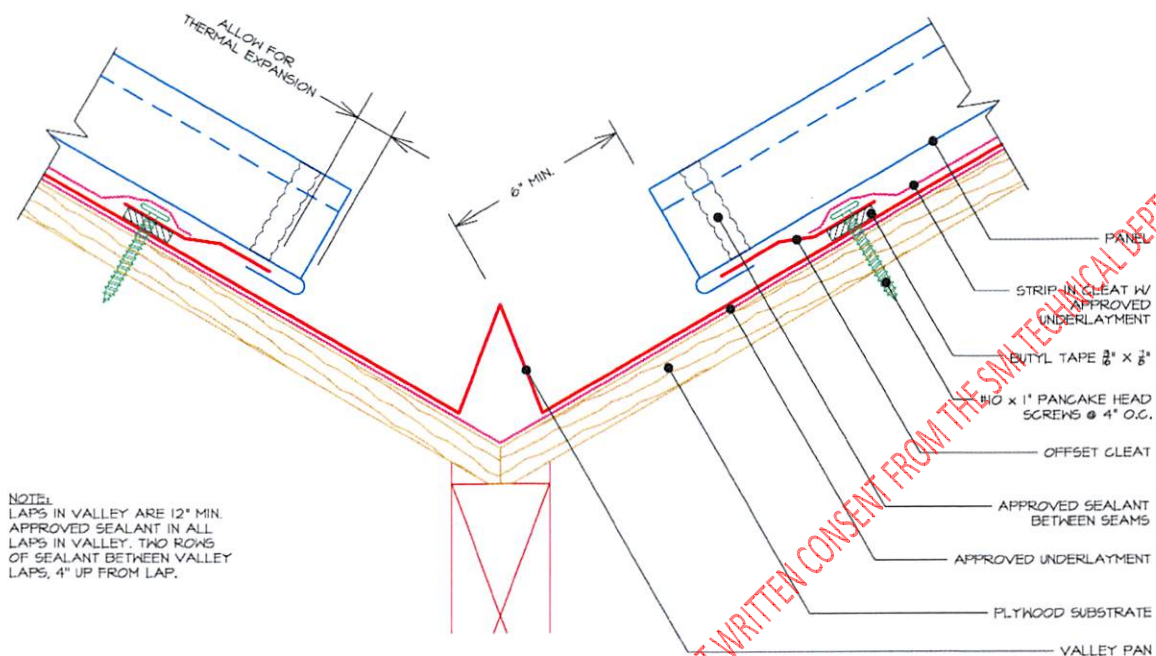

Valley Detail

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Appendix B: Photographs



Prior To Testing



Subsequent To Testing

Continued on Following Page

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.



Prior To Completion of Interval 1: 35mph



Prior To Completion of Interval 2: 0mph



Prior To Completion of Interval 3: 70mph



Prior To Completion of Interval 4: 0mph

Continued on Following Page

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.



Prior To Completion of Interval 5: 90mph



Prior To Completion of Interval 6: 0mph



Prior To Completion of Interval 7: 110mph



Prior To Completion of Interval 8: 0mph

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Appendix C: Calibration

Windstream Calibration

Procedure: The windstream velocity calibration is conducted on a vertical plane grid measuring 8' wide by 4' high and grid dimensions of 2' by 2'. The plane is located in front of the wind tunnel exit. For each axial velocity setting, windstream pressures are measured using either a Dwyer Model 605-3 or 605-10 Magnehelic Differential Pressure Indicating Transmitter to a Dwyer Model 160-48 Pitot Tube. Velocity pressures for each grid square are observed as inches of water and converted to miles per hour according to the below relationship.

$$MPH = 12.4625 \sqrt{P_v / d}$$

where, P_v represents the velocity pressure in inH₂O and d represents the density of air in lbs/ft³ adjusted for temperature, barometric pressure, and relative humidity.

The measured windstream velocity within each grid square shall be within ±10% of the required axial velocity for each wind speed.

Data and Calculations: Data from the most recent calibration indicate that the wind generator provides a suitably constant wind profile for the TAS 100-95 test procedure. Windstream velocity calibration data is provided in the table that follows on the next page.

Windstream Velocity Calibration

Date of Calibration Procedure: **09/14/20**

Next Due: **March-21**

Ambient Temperature:

85.0

°F

Barometric Pressure:

30.06

in Hg

Relative Humidity:

66

%

RPM	Grid Position	Velocity Pressure (in H ₂ O)	Windstream Velocity (mph)	Grid Position	Velocity Pressure (in H ₂ O)	Windstream Velocity (mph)	Grid Position	Velocity Pressure (in H ₂ O)	Windstream Velocity (mph)	Grid Position	Velocity Pressure (in H ₂ O)	Windstream Velocity (mph)
1100	1	0.50	32.8	5	0.50	32.8	3	0.50	32.8	4	0.60	35.9
	5	0.50	32.8	6	0.50	32.8	7	0.50	32.8	8	0.60	35.9
Target: 35 mph		Calibration: Each Grid Square shall be within ± 10% of 35 mph (31.5 - 38.5 mph)								Pass/Fail: Pass		
2200	1	2.2	68.7	5	2.3	70.2	3	2.4	71.8	4	2.4	71.8
	5	2.3	70.2	6	2.3	70.2	7	2.4	71.8	8	2.5	73.2
Target: 70 mph		Calibration: Each Grid Square shall be within ± 10% of 70 mph (63 - 77 mph)								Pass/Fail: Pass		
3000	1	3.7	89.1	5	3.8	90.3	3	3.9	91.5	4	4.0	92.6
	5	3.8	90.3	6	3.8	90.3	7	3.9	91.5	8	4.1	93.8
Target: 90 mph		Calibration: Each Grid Square shall be within ± 10% of 90 mph (81 - 99 mph)								Pass/Fail: Pass		
3600	1	5.6	110	5	5.6	110	3	5.7	111	4	5.8	112
	5	5.6	110	6	5.7	111	7	5.8	112	8	5.8	112
Target: 110 mph		Calibration: Each Grid Square shall be within ± 10% of 110 mph (99 - 121 mph)								Pass/Fail: Pass		

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Simulated Rainfall and Flow Meter Calibration

Procedure: Water is supplied to the windstream via mounted sprinkle-pipes. Calibration is conducted in essentially two steps. First, the flow meter readings, in gal/min, are recorded, summed, and input into the following equation:

$$\left[\frac{\left(\frac{\text{gallons}}{\text{minute}} \right) \times \left(\frac{60 \text{ minutes}}{1 \text{ hour}} \right) \times \left(\frac{231 \text{ inches}^3}{1 \text{ gallon}} \right)}{11,520 \text{ inches}^2} \right] = \left(x \frac{\text{inches}}{\text{hour}} \right)$$

The quantity x determined above shall be within $\pm 5\%$ of the desired rainfall simulation of 8.8 inches/hour.

Second, the quantity of water captured in one (1) minute is weighed, converted to volume, and input into the below equation:

$$\left[\frac{\left(\frac{\text{inches}^3}{11,520 \text{ inches}^2} \right) \times \left(\frac{60 \text{ minutes}}{1 \text{ hour}} \right)}{1 \text{ minute}} \right] = \left(y \frac{\text{inches}}{\text{hour}} \right)$$

The flow meter determination x shall be within $\pm 5\%$ of the quantity y determined above.

Data and Calculations: Data from the most recent calibration indicate that an appropriate volume of water is applied during the TAS 100-95 test procedure. Simulated rainfall and flow meter calibration data is provided in the below table.

Simulated Rainfall and Flow Meter Calibration						
These settings are for 35mph						
Date of Calibration Procedure: 09/14/20				Next Due: December-20		
X	Water Supply (gal/min)	Simulated Rainfall (in/hr)	Y	Weight (lbs)	Volume (in ³)	Simulated Rainfall (in/hr)
Flow Meter #1	2.4	2.9	Flow Meter #1	19.8	548.1	2.9
Flow Meter #2	4.8	5.8	Flow Meter #2	40.2	1112.7	5.8
Total	7.2	8.7	Total	60.0	1660.8	8.6
Simulated Rainfall		8.7	Simulated Rainfall		8.6	
Target		8.8	Target		8.7	
Within $\pm 5\%$ Tolerance		Pass	Within $\pm 5\%$ Tolerance		Pass	

Simulated Rainfall and Flow Meter Calibration						
These settings are for 70+ mph						
Date of Calibration Procedure: 09/14/20				Next Due: December-20		
X	Water Supply (gal/min)	Simulated Rainfall (in/hr)	Y	Weight (lbs)	Volume (in ³)	Simulated Rainfall (in/hr)
Flow Meter #1	3.6	4.3	Flow Meter #1	30.1	833.2	4.3
Flow Meter #2	3.6	4.3	Flow Meter #2	30.1	833.2	4.3
Total	7.2	8.7	Total	60.2	1666.3	8.7
Simulated Rainfall		8.7	Simulated Rainfall		8.7	
Target		8.8	Target		8.7	
Within $\pm 5\%$ Tolerance		Pass	Within $\pm 5\%$ Tolerance		Pass	

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.

Water Distribution Check

Procedure: The water distribution of simulated rain fall over the test frame was determined by placing a thick absorptive material on the deck sheathing, determining the amount of water absorbed during a set time interval, and verifying the water distribution profile within given tolerances. The procedure outlined in TAS 100-95 and was followed. The deck was set to a 2in:12in slope. The thick absorptive material used was 46 gauge organic felt. Wind driven rain was applied for approximately six (6) minutes. Each individual 2' x 2' wetted square was weighed using an Ohaus Model I-10 Scale.

The simulated rainfall calculated for each 2' x 2' wetted square shall be within either $\pm 15\%$ (at 35mph) or $\pm 10\%$ (at 70mph) of every other wetted square.

Data and Calculations: Data from the most recent calibration indicate that the wind generator and water supply system provides a suitably constant water distribution profile for the TAS 100-95 test procedure. Water distribution check data is provided in the table below.

Water Distribution Check															
Date of Calibration Procedure:		09/14/20				Next Due:		March-21							
Ambient Temperature:		84.0 °F				Barometric Pressure:		30.06 in Hg							
Relative Humidity:		66 %				Windstream Velocity:		35 mph							
Water Supply:		8.8 gal/min				Elapsed Time:		6 min							
Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)	Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)	Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)	Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)
1	180.0	671.0	8.52	2	185.0	670.0	8.42	3	190.0	703.0	8.91	4	185.0	663.0	8.30
5	180.0	684.0	8.75	6	180.0	682.0	8.72	7	180.0	691.0	8.87	8	185.0	672.0	8.45
9	185.0	695.0	8.85	10	180.0	691.0	8.87	11	185.0	683.0	8.65	12	190.0	692.0	8.72
13	190.0	663.0	8.21	14	180.0	705.0	9.08	15	190.0	664.0	8.23	16	185.0	700.0	8.94
17	185.0	702.0	8.98	18	185.0	710.0	9.11	19	180.0	712.0	9.24	20	185.0	680.0	8.59
Target: No one particular square sample shall exhibit a rainfall simulation greater than or less than 15% of any other square sample.															
High Value:		9.24		Low Tolerance:		7.85		Pass/Fail:		Pass					
Low Value:		8.21		High Tolerance:		9.44									
Windstream Velocity:		70 mph				Water Supply:		8.8 gal/min				Elapsed Time:		6 min	
Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)	Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)	Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)	Grid Position	Dry Felt (g)	Wetted Felt (g)	Simulated Rainfall (in/hr)
1	180.0	662.0	8.4	2	180.0	683.0	8.73	3	180.0	682.0	8.72	4	180.0	694.0	8.92
5	180.0	691.0	8.9	6	180.0	689.0	8.84	7	180.0	690.0	8.85	8	180.0	681.0	8.70
9	185.0	700.0	8.9	10	185.0	701.0	8.96	11	185.0	687.0	8.72	12	185.0	683.0	8.65
13	185.0	694.0	8.8	14	185.0	694.0	8.84	15	185.0	691.0	8.78	16	185.0	698.0	8.91
17	190.0	699.0	8.8	18	190.0	700.0	8.85	19	190.0	707.0	8.98	20	190.0	712.0	9.06
Target: No one particular square sample shall exhibit a rainfall simulation greater than or less than 10% of any other square sample.															
High Value:		9.06		Low Tolerance:		8.16		Pass/Fail:		Pass					
Low Value:		8.37		High Tolerance:		9.20									

END OF REPORT

1802T0001

The test results, opinions, or interpretations are based on the material supplied by the client. This report is for the exclusive use of stated client. No reproduction or facsimile in any form can be made without the client's permission. This report shall not be reproduced except in full without the written approval of this laboratory. PRI Construction Materials Technologies LLC assumes no responsibility nor makes a performance or warranty statement for this material or products and processes containing this material in connection with this report.