


REGAL WHITE



MATTE BLACK




MANSARD BROWN



DARK BRONZE



SOLAR WHITE



STONE WHITE




SANDSTONE



SURREY BEIGE



DOVE GRAY

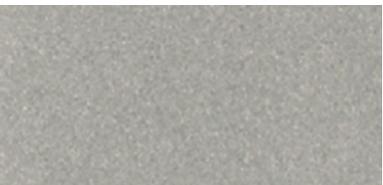

SILVER \*



ASH GRAY



SIERRA TAN




HARTFORD GREEN \*



COLONIAL RED




EVERGREEN

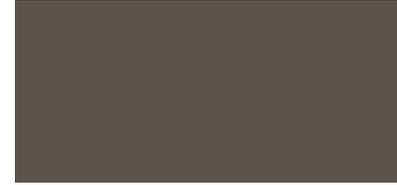

MEDIUM BRONZE




CHARCOAL GRAY

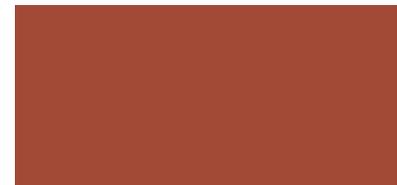

TERRA COTTA



COPPER \*

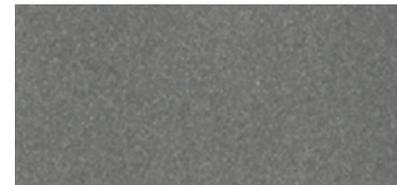

PRE-WEATHERED GALVALUME® \*



Sheffield Metals International

ALUMINUM COLORS



See our colors on your roof or wall with our Color Visualizer!

Scan the QR code on the left or visit [qrco.de/bbxEie](http://qrco.de/bbxEie) to get started.

STEP 1: Take a picture of your roof.

STEP 2: Upload your image.

STEP 3: Find your perfect Sheffield Metals color!

\* Available at a slight price premium

\* Metallic premium

Oil canning is an aesthetic issue and is an inherent part of light gauge cold formed metal products. By using coil that has been processed properly, designing for thermal movement, following stringent specifications for installation and proper handling most oil canning can be minimized. Oil canning is not grounds for coil/panel rejection.




Sherwin-Williams® is a trademark of SWIMC LLC.



Find us in MasterSpec®  
Powered by Delttek Specpoint®



SLATE BLUE



SLATE GRAY

STOCK AVAILABILITY MATRIX	LEED V4.1	ISR	EMI	3 YR. SRI	SRI	.032 NOM. 40.500"	.032 NOM. 48.000"	.040 NOM. 48.000"	.050 NOM. 48.000"	.063 NOM. 48.000"
	Ash Gray		0.32	0.83	31	31	●	●	●	
Charcoal Gray		0.25	0.83	22	22	●	●	●		
Colonial Red		0.25	0.83	22	22	●	●			
Copper Metallic	L	0.35	0.75	32	32	●	●			
Dark Bronze		0.25	0.83	22	22	●	●	●	●	●
Dove Gray	L	0.35	0.83	35	35	●	●	●		
Evergreen		0.25	0.83	22	22	●	●	●		
Hartford Green		0.25	0.83	22	22		●	●	●	
Mansard Brown		0.25	0.83	22	22	●	●	●	●	
Matte Black		0.25	0.83	22	22	●	●	●	●	●
Medium Bronze		0.25	0.83	22	22	●	●	●	●	●
Pre-weathered Galvalume®		0.24	0.83	23	21	●	●			
Regal White	L	0.65	0.83	77	77	●	●	●	●	●
Sandstone	L	0.35	0.83	35	35	●	●	●		
Sierra Tan		0.31	0.87	30	31	●	●	●		
Silver Metallic	L	0.54	0.77	55	60	●	●	●	●	
Slate Blue		0.25	0.83	22	22	●				
Slate Gray	L	0.35	0.83	35	35	●	●	●	●	
Solar White	L	0.65	0.83	77	77	●	●	●	●	●
Stone White	L	0.55	0.83	59	63	●	●	●		
Surrey Beige	L	0.35	0.75	32	32	●	●			
Terra Cotta	L	0.35	0.83	35	35	●	●	●		
Custom Colors						▲	▲	▲	▲	▲

## NOTES

- All of Sheffield's CoolR® metal is painted with a .20 mil primer and .70 - .90 mil Top Coat of 70% PVDF resin-based coating. The reverse side has a .20 primer and .30 - .40 backer coating.
- For low slope roofing to meet LEED V5 requirements, the initial SRI must be ≥ 82 OR the 3-year SRI must be ≥ 64. For steep slope roofing to meet LEED V5 requirements, the initial SRI for 75% of the roof must be ≥ 39 OR the 3-year SRI must be ≥ 32.
- Low slope is defined as ≤ 2:12. Steep slope is defined as > 2:12.
- Materials should be stored in a cool, dry place. Materials with PVC film on project sites should be used immediately or stored in a climate-controlled setting. PVC film must be removed prior to installation.
- Anything not noted in the Availability Matrix can be painted, regardless of width, substrate, or thickness; however, it would be subject to a minimum paint run and would need to meet standard custom order criteria.

## KEY

- = Stocked Item
- ▲ = Available on Custom Order Basis
- L = LEED V5 Eligible
- ISR = Initial Solar Reflectance
- EM = Emissivity
- SRI = Solar Reflectance Index

Colors shown are matched as accurately as possible, but may vary slightly from the finished product. These rich and vibrant colors are produced with PVDF resins, which provide superior color retention and allow Sheffield Metals to offer non-prorated coating warranties for most applications. Touch-up should only be done with a Sheffield Metals color-matched PVDF air-dry paint pen.

Galvalume® is a registered trademark of BIEC International Inc. Coating warranty varies for CoolR® Matte Black, Copper, Silver, and Pre-Weathered Galvalume. Please contact your representative for more information.