
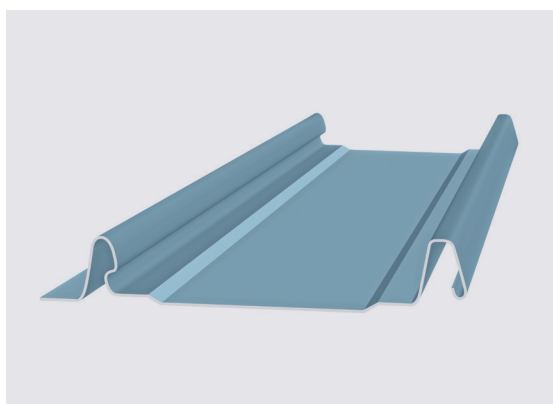
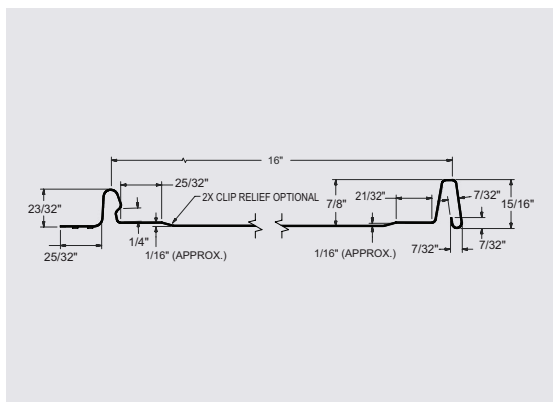


SMI 1.0" FF SNAPLOCK PANEL PROFILE

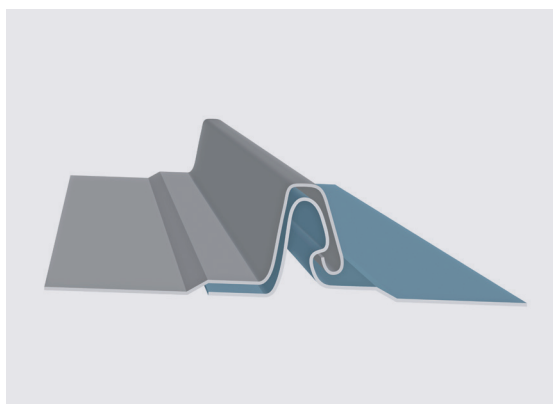

PANEL INFORMATION

Panel Type	Standing Seam
Panel Seam	SnapLock
Panel Width	16"
Seam Height	1.0"
Panel Material	22 ga—24 ga min.
Panel Surface	Smooth / Embossed Optional
Panel Clip	None
Minimum Slope	3/12
Substrate	Plywood

PANEL TESTING

Uplift Resistance	UL 580, UL 1897, UL 90
Wind Driven Rain	TAS 100
Hail Rating	Class 4 Impact UL 2218
Fire Rating	UL Class A
Texas Department of Insurance Approval	RC-560
FBC HVHZ & Non-HVHZ Approval	FL18316

PANEL NOTES

With this 24 GA, 16" wide panel, you may opt to use heavier gauge coil and narrower width panels. Fastener spacing will not change.

This panel uses a 20" coil. Maximum width coil of 24".

This panel uses 4-1/16" of material to form the panel.

Divide the coil width by the panel width to determine your roof multiplier. Take the square footage of the roof and multiply that by the roof multiplier to determine the amount of coil needed to manufacture the panels. This does not include estimated waste.

This panel is NOT approved for Weathertight Warranties.