
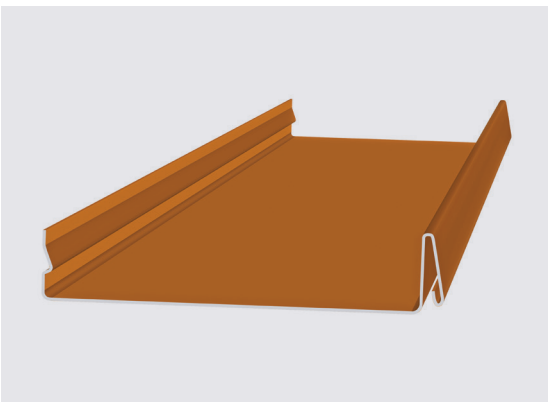
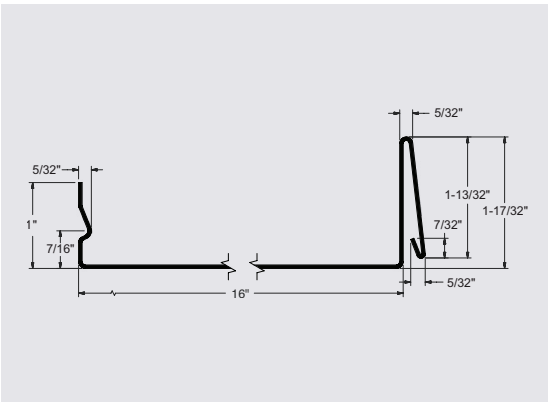


SMI 1.5" SNAPLOCK 450 PLUS PANEL PROFILE

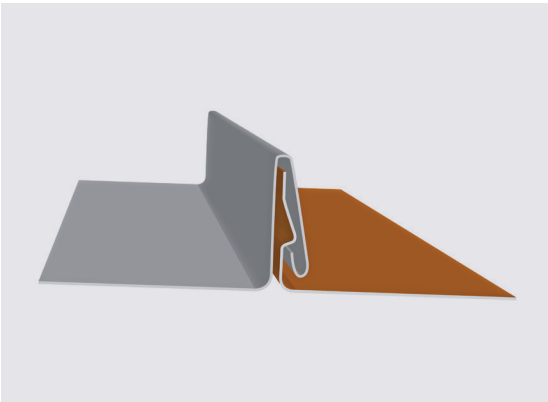

PANEL INFORMATION

Panel Type	Standing Seam
Panel Seam	SnapLock
Panel Width	16"
Seam Height	1.5"
Panel Material	22 ga—24 ga min.
Panel Surface	Smooth / Embossed Optional
Panel Clip	Required Per Engineering
Minimum Slope	3/12
Substrate	Plywood

PANEL TESTING

Uplift Resistance	UL 580, UL 1897, UL 90
Hail Rating	Class 4 Impact UL 2218
Fire Rating	UL Class A
Texas Department of Insurance Approval	RC-564
FBC Non-HVHZ Approval	FL18316

PANEL NOTES

With this 24 GA, 16" wide panel engineering, you may opt to use heavier gauge coil and narrower width panels. Clip spacing will not change.

This panel uses a 20" coil.

This panel uses 4-1/8" of material to form the panel.

Divide the coil width by the panel width to determine your roof multiplier. Take the square footage of the roof and multiply that by the roof multiplier to determine the amount of coil needed to manufacture the panels. This does not include estimated waste.

This panel is approved for Weathertight Warranties.